

FAQ's from Residents

Water Project

How does the Chlorination process work?


The chlorination starts at the main and the newly installed line into your property is flushed and cleaned prior to being put into service. This is to ensure that there is no contamination in the line.

What is a Curb Stop?

A **curb stop** is the valve which the Town will install to turn the water service off and on to a building.

The requirements as noted in the tender are to be *“standard brass with drain and flared or compression type joints Mueller Mark II Oriseal Valve with drain or equal. The value casing shall be John East No. 3063 curb box or equal to and shall be asphalt enamel coated”*. Asphalt Enamel Coated is a primer is applied to the blast cleaned surface and then the asphalt enamel, and various wraps are applied to this primed surface to build up the coating thickness.

The drawing is not to scale at all and may not be exactly how the contractor will install, but at least it gives you an idea of how the curb box and water lines look like underground.

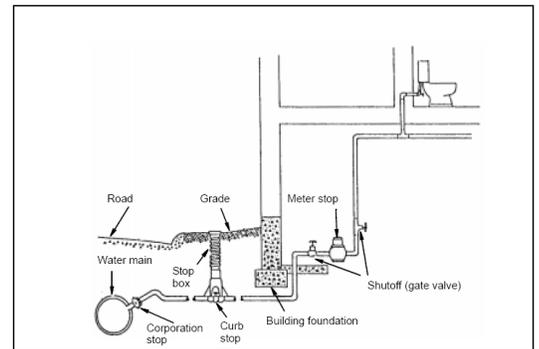

What is the Residential Water Meter Size?



The Town of Pilot Butte will be using a 5/8" x 3/4" Sensus Iperls Water Meter with a transmitter. The water meter will be installed on the water line in your basement. Once the meter is installed and the water is flowing, the meter transmits a remote signal that will be read by the

Water Department on a monthly basis.



Electronic Register LCD Display

What is happening with the 5th Avenue Asphalt?

Due to the heavy rains, Ed's Contracting has been unable to complete the asphalt work on 5th Avenue by the original anticipated date. Subject to weather conditions, the work is expected to be completed the 2nd week of June, with the completion of Butte Street to follow.